

# CLIK COB 100÷240V-AC

IP65

20W - 2600Lm

6.000°K - 40.000h

RoHS RAE CONFORMITY



Snodi dotati di galletto per comodità di bloccaggio  
*Joints equipped with wing nut for comfort clamping*



Interruttore ergonomico on/off  
*Ergonomic on/off switch*




cavo con spina Schuko  
*cable with Schuko plug*

## CARATTERISTICHE

Fino all'85% di risparmio energetico  
Basso calore  
Zero manutenzione  
Testa orientabile in alluminio estruso con vetro ad alta resistenza  
Bracci facilmente regolabili  
Resistente ai lubro-refrigeranti  
Direttive 2006/95/CE, 2004/108/CE e 2006/42/CE come previsto dalla Normativa UNI EN 1837

## FEATURES

*Up to 85% energy saving  
Low performing heat  
Zero maintenance  
Adjustable extruded aluminium head with high resistance glass  
Easily adjustable arms  
Resistant to coolants and lubricants  
Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative UNI EN 1837*

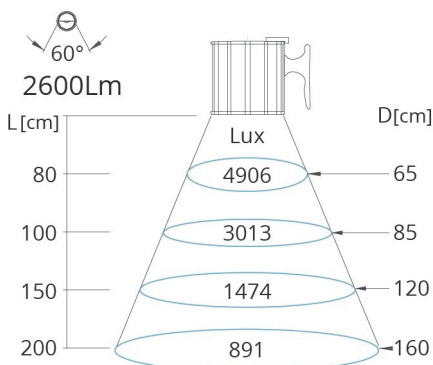

# CLIK COB 100÷240V-AC - 20W - IP65



100÷240V-AC

**Alimentazione:**

100÷240V-AC con alimentatore integrato nella base e cavo con spina Schuko

**Voltage:**

100÷240V-AC with LED driver built-in the base and cable with Schuko plug

**Standard:**

Modulo Led con angolo 60°

**Standard:**

60° LED Module

**Accessori opzionali:**

morsetti, staffa di fissaggio

**Optional Accessories:**

clamps, angle plate.

100÷240V AC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	CN20 L60-S-100÷240V-AC	10.01.1.60.20.3	100÷240V AC	20WX1	1,80	2,3

100÷240V AC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	CN20 L60-M2-100÷240V-AC	10.02.1.60.20.3	100÷240V AC	20WX1	1,80	2,4

100÷240V AC	ART.	CODE	VIN	WxLed	cable.mt	Kg
	CN20 L60-L2-100÷240V-AC	10.03.1.60.20.3	100÷240V AC	20Wx1	1,80	2,8

**RICAMBI STANDARD E OPTIONAL  
STANDARD AND OPTIONAL SPARE PARTS**

**SCATOLA MADRE  
MASTER BOX**

<p><b>CLAMP</b></p> <p>ART JC 02 CODE 00.11.010.1</p>	<p><b>ANGLE PLATE</b></p> <p>ART JL 02 CODE 00.11.012.1</p>	<p><b>NEUTRAL GLASS</b></p> <p>ART FIL 109N CODE 01.07.004.0</p>
---	---	--



Qty: 6 pcs  
Dimensions: 32x50x52 cm  
Weight: 16/20 Kg

THE DATA ARE NOT BINDING AND CAN BE CHANGED WITHOUT ADVANCE NOTICE.